

The background image shows a vast field of solar panels under a sunset sky, with several wind turbines visible in the distance. The sun is low on the horizon, creating a warm, golden glow.

Liquid Cooled Integrated Cabinet Energy Storage System

M125G261A



M125G261A is an newly developed C&I energy storage product for grid-connected application scenarios. The product highly integrates Li-FePO₄ batter, BMS, PCS, EMS, re protection system, liquid cooling system. Innovative integrated design, small volume and large energy, provide customers with low-carbo and high-yield energy storage solutions.

High integration

- Highly integrated with energy storage unit, PCS, BMS, EMS, fie protection and temperature control systems.
- Covering an area of 1.35M² and a height of only 2.17m, leading in the industr

High safety

- Three-level protection system, accurately monitoring short ircuit, over-current, over-voltage, over-temperature and other abnormalities.
- Three-level fre protection for module, cluster level and waterer reprotection, and two-level explosion-proof design for module and cabinet.

High efficiency

- PCS uses the third generation semiconductor silicon carbide solution.
- Intelligent liquid cooling temperature control strategy to reduce power consumption.
- System conversion efficiency up to 90%.


Intelligent management

- Built-in EMS, with the TOPBAND cloud platform to achieve remote monitoring, remote setting, revenue calculation, remote upgrade, data analysis, cloud warning and other functions.
- Mobile APP function and local web function, convenient on-site operation and maintenance.

About Ecosolex

As a sub-brand of Shenzhen Topband Co.,Ltd., Ecosolex delivers advanced solar, storage, and charging solutions for residential, commercial, and industrial use. Backed by Topband's decades of expertise, over 2,000 research professionals, and more than 3,200 patents, we provide reliable, safe, and sustainable energy systems. With 15 global production and R&D bases, Ecosolex empowers customers worldwide to achieve energy independence and contribute to a greener, more sustainable future.

Liquid Cooled Integrated Cabinet
Energy Storage System
M125G261A

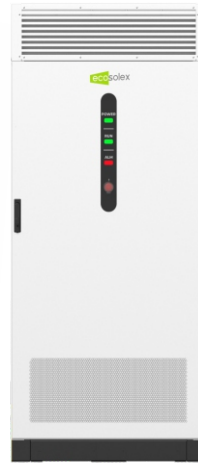

Model		M125G261A
System	Nominal capacity	314Ah
	Nominal energy	261kWh
	Usable energy	≥243kWh
	Nominal output power	125kW
	IP rating	IP54
	Operating temperature	-20~55°C
	Cooling mode	Liquid cooling
	Fire Protection	Aerosol
	Altitude	4000m(>2000m derate)
	Cycle life	≥8000 cycles
	Dimension(W*D*H)	1000*1350*2170mm
	Weight	≈2500kg
	Certification	GB/T36276
AC (on-grid)	Nominal voltage	400V
	Nominal output current	180A
	AC access method	3L+N+PE
	Allowable voltage range	400V(-20%~+15%)
	Grid frequency range	50Hz/60Hz±2.5Hz
	Power factor	-0.99~+0.99
	Charge/discharge conversion time	<100ms
DC	Voltage range	728V, 949V
	DC Max. current	180A
	Rated DC power	125kW
	Battery type	Lithium iron phosphate (LiFePO4)
	PACK configuration	5*1P52S
Liquid Cooling System	Cooling capacity	5kW
	Rated circulating water flw	46.5@60kPaL/min
	Refrigerant	R134a
	Carrier refrigerant	Pure water, aqueous solution containing 50 per cent ethylene glycol